



VELOCITY SU-matic®
 VELOCITYPRODUCTS.COM

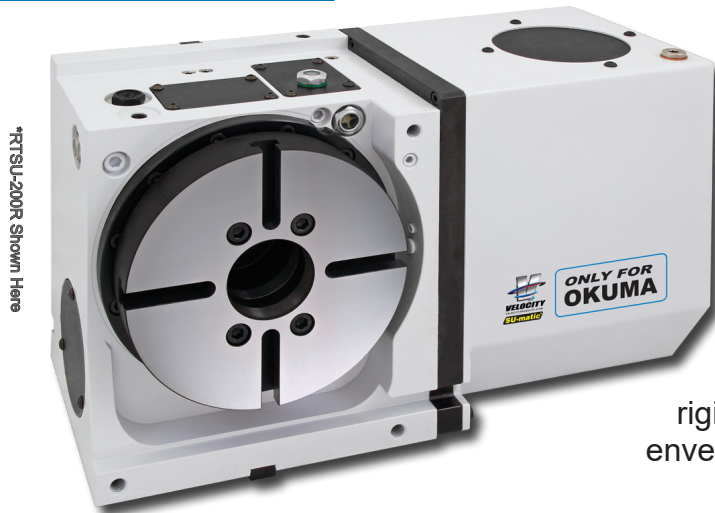


VELOCITY ROTARY TABLES - RTSU-200R / RTSU-200L

Worldwide Leader in Machining Technology for OKUMA • Made ONLY for OKUMA






Innovative Design • Proven Technology

- Complete Kit with Table / Faceplate / Steel Braided Cables / Toe Clamp Kit
- Tailstocks, Support Tables, and more accessories coming
- Available from your local OKUMA dealer
- Tables In-Stock - Ready to Ship
- **3 YEAR WARRANTY**



Rigidity • Accuracy

An ultra precision cross roller bearing is located just behind the faceplate allowing for exceptional accuracy, repeatability, and rigidity. Much more allowable working load and envelope compared to other 200mm sized tables.

Repeatability	arc sec.	±2
Net Weight	kg (lbs.)	90 (199)
Allowable wheel torque	Nm (ft. lbs.)	288 (212)
Allowable work inertia	kg.m ²	1.25
Allowable work weight	 kg (lbs)	175 (386)
	 kg (lbs)	350 (772)
Allowable load when table clamped	 N (lbf)	20,000 (4,496)
	 Nm (ft. lbs.)	800 (590)
	 Nm (ft. lbs.)	2,500 (1,844)

MA-550V
MA-650V
GENOS M460-VE
GENOS M560-V
MB-46V
MB-46VE
MB-56V

* For additional rotary table info or pricing please contact your local Velocity Representative at 256-258-5549 or sales@velocityproducts.com.*

Please also visit www.velocityproducts.com to learn more about this product and all the Okuma exclusive products Velocity offers.