


VELOCITY TOOLING FOR OKUMA LB2000/LB3000 M/MY/MYW

Quick Change Tools



LB2000/LB3000 C4 Face Tool

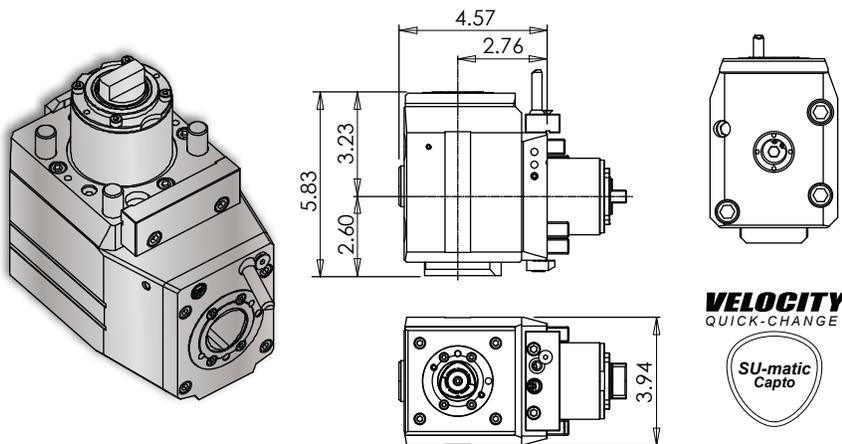

Notes

REGO-FIX® C4 Collet Chucks

ER Output	Rego-Fix Part #
ER-16	2804.11630
ER-20	2804.12010
ER-25	2804.12510
ER-32	2804.13210


Turret Plugs V01-D0-0511

* 1,450 psi internal coolant (IC) face tool **CAN** be run without coolant; the coolant sealing mechanism can be completely dis-engaged.

All coolant thru live tools require 30 micron coolant filtration nominal, 50 micron coolant filtration absolute.

Tool #	Coolant	Output	Rotation (In:Out)	Ratio (In:Out)	Max. RPM	Torque	Hex Wrench	C4 Collet Chucks
14.800.0.0233.3	IC & EXT* 1,450 psi	C4	CW:CW	1:1	6,000	60 Nm	10 mm	See Above

LB2000/LB3000 C4 OD-I Length Turning Holder

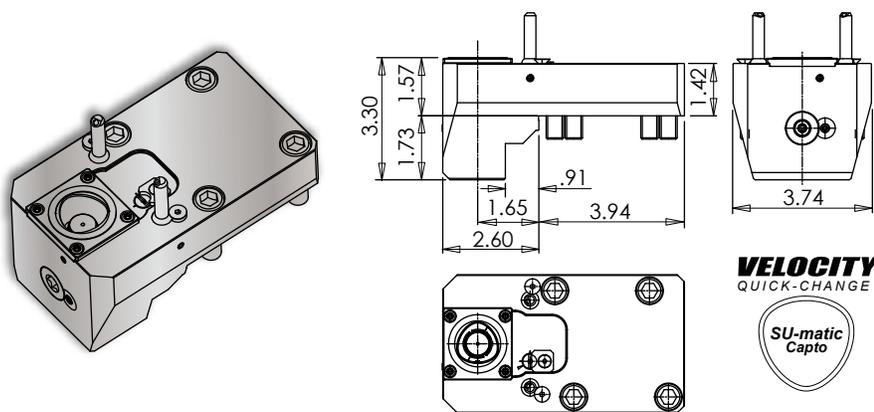

Notes

REGO-FIX® C4 Collet Chucks

ER Output	Rego-Fix Part #
ER-16	2804.11630
ER-20	2804.12010
ER-25	2804.12510
ER-32	2804.13210

Turret Plugs V01-D0-0511

VELOCITY tooling for **OKUMA** is manufactured on **OKUMA** machine tools.

Quick Change static tools are coolant thru. Coolant filtration is recommended.

Lathe Model	Tool #	Reversible (Main/Sub)	Coolant	Output	Hex Wrench	C4 Collet Chucks
LB3000 M	14.910.0.0239.0	No	IC/EXT	C4	10 mm	See Above

VELOCITY

VELOCITYPRODUCTS.COM