



# VELOCITY TOOLING FOR OKUMA LB2000/LB3000 M/MY/MYW

## Live Tools

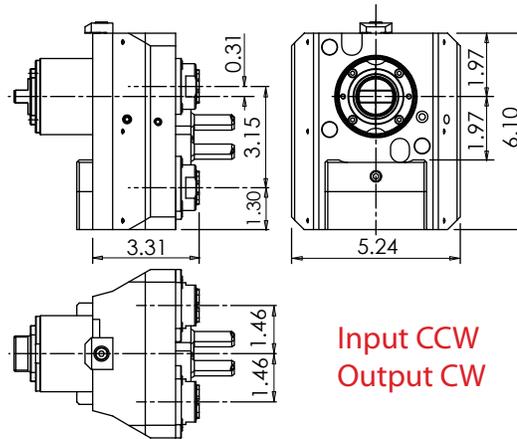

### LB3000 MYW Offset Quad Output Cross Tool • ERAX-16 Outputs

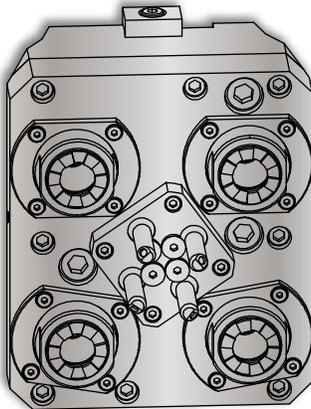

### Notes



#### Wrenches Included with Tools

Maximum Drill Ø	Maximum Mill Ø
13/32"	5/16"
<b>Turret Plugs</b>	
V01-D0-0511	

**VELOCITY Quick Change** driven tools are greased for life and delivered ready to use - **no run-in required**. All driven tools are CMM inspected and internal coolant tools are pressure tested as a final quality check prior to shipment.

Tool #	Coolant	Output	Rotation (In:Out)	Ratio (In:Out)	Max. RPM	Torque	Spindle Wrench	Collet Wrench
14.101.0.0164.0	EXT	(4) ERAX-16	CCW:CW	1:1	6,000	35 Nm	32 mm	7117.16000

### LB2000/LB3000 Face Tools • ER-32 Output

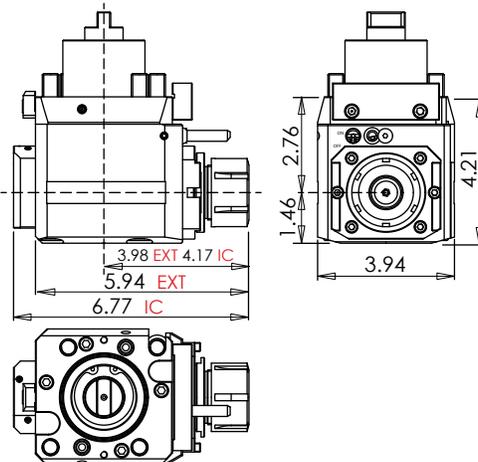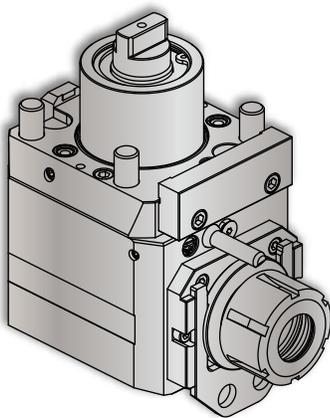

### Notes

#### Wrenches Included with Tools

Maximum Drill Ø		Maximum Mill Ø	
EXT	13/16"	EXT	23/32"
IC	3/4"	IC	23/32"
<b>Turret Plugs</b>		<b>V01-D0-0511</b>	

\* 1,450 psi internal coolant (IC) face tool **CAN** be run without coolant; the coolant sealing mechanism can be completely dis-engaged.

**All coolant thru live tools require 30 micron coolant filtration nominal, 50 micron coolant filtration absolute.**

Tool #	Coolant	Output	Rotation (In:Out)	Ratio (In:Out)	Max. RPM	Torque	Spindle Wrench	Collet Wrench
14.800.0.0379.0	EXT	ER-32	CW:CW	1:1	6,000	60 Nm	1005100950	7111.32000
14.800.0.0378.0	IC & EXT* 1,450 psi	ERC-32	CW:CW	1:1	6,000	60 Nm	1005100950	7111.32000

# VELOCITY

VELOCITYPRODUCTS.COM