


VELOCITY TOOLING FOR OKUMA LB4000 M/MY/MWY

Live Tools



LB4000 M Face Tools • ER-40 Output

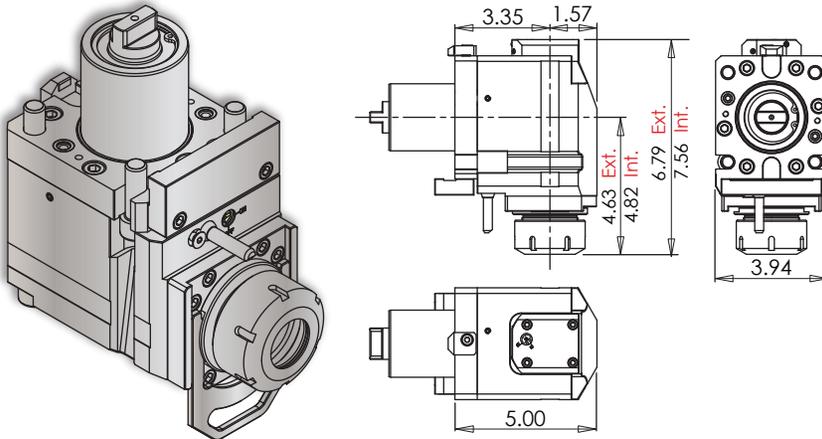

Notes

Wrenches Included with Tools

Maximum Drill Ø		Maximum Mill Ø	
EXT	1"	EXT	15/16"
IC	1"	IC	15/16"


Turret Plugs V01-D0-0521

* 1,450 psi internal coolant (IC) face tool **CAN** be run without coolant; the coolant sealing mechanism can be completely dis-engaged.

All coolant thru tools require 30 micron coolant filtration nominal, 50 micron coolant filtration absolute.

Tool #	Coolant	Output	Rotation (In:Out)	Ratio (In:Out)	Max. RPM	Torque	Spindle Wrench	Collet Wrench
14.800.0.0435.0	EXT	ER-40	CW:CW	1:1	6,000	85 Nm	1005101120	7111.40000
14.800.0.0434.0	IC & EXT* 1,450 psi	ERC-40	CW:CW	1:1	6,000	85 Nm	1005101120	7111.40000

LB4000 MYW Main/Sub Spindle Face Tool • ER-40 Outputs

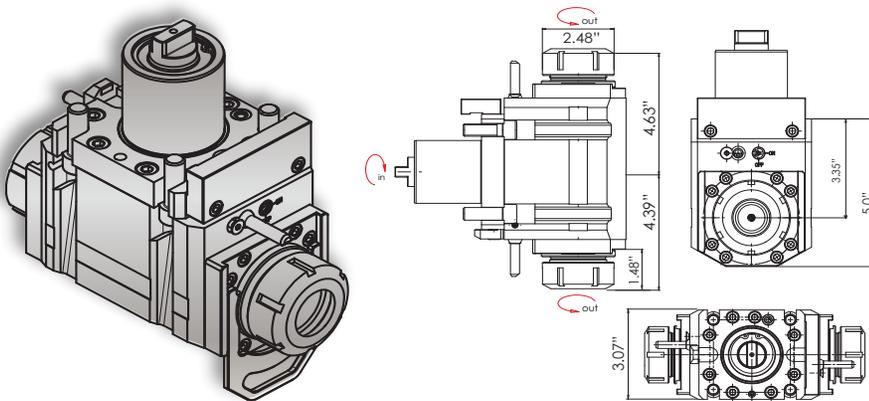

Notes

Wrenches Included with Tools

Maximum Drill Ø	Maximum Mill Ø
1.0"	15/16"

Turret Plugs V01-D0-0521

* 1,000 psi internal coolant (IC) cross tool **CANNOT** be run without coolant.

All coolant thru tools require 30 micron coolant filtration nominal, 50 micron coolant filtration absolute.

Tool #	Coolant	Output	Rotation (In:Out)	Ratio (In:Out)	Max. RPM	Torque	Spindle Wrench	Collet Wrench
14.801.0.0212.0	E/C	ER-40	See Dwg. Above	1:1	6,000	85 Nm	1005101120	7111.40000

VELOCITY

VELOCITYPRODUCTS.COM